MATERIAL:

CYLINDER: STEEL

OPERATING HEAD: BRASS HOT STAMPING

COATING:

CYLINDER: RED RAL 3000

FIRE RATING : 13A 89B C
CAPACITY : 2 KG
MIN DISCHARGE TIME : 12 s
DISCHARGE RANGE : 3 m
TEST PRESSURE : 27 bar
WORKING PRESSURE : 13 bar (20°C)

CLASS : A B C


DESIGN STANDARD : APPROVAL EN3, MED, PED


WEIGHT:

EMPTY : 2,1 kg FULL : 4,1 kg

TEMPERATURE OF USE : -20°C and +60°C

USE ON VOLTAGE OVER 1000V.UP TO 35 Kv ACCORDING TO LABEL INSTRUCTION ON FIRE EXTINGUISHER

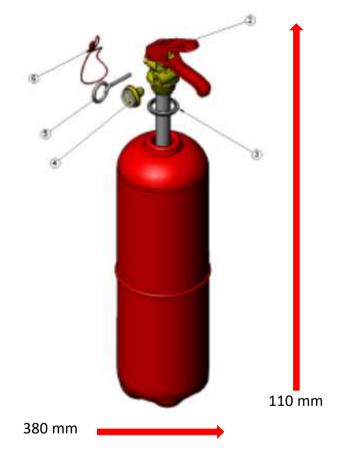





ТҮРЕ	PROD NO
EXTINGUISHER PP2P WITH MARINE BRACKET	766995

1		Valve with syphon tube F/PP2P Interchange unit F/PP2P	766995
	1	Valve with syphon tube F/PP2P	
2			
3	1	Valve seal F/PP2P 10 pck	671552
4	1	Gauge F/All ext PP 5pck	674234
5	1	Safety pin F/PP2P 10pck	671560
6	1	Wire and seal F/All ext. 90pck	667600
7	1	M. bracket F/PP2P	766969



01	Drawn by/date MB 30/11/2017
ev no.	Issued by/date MB 30/11/2017
	Approved by/date

Main product group or System

SURVITEC PORTABLE FIRE FIGHTING EQUIPMENT

Product

POWDER EXTINGUISHER 2KG ABC MODEL PP2P

Product no.

See Table

Data sheet no.

29-01-124

6080224 Ed01