

RESCUE BOAT
RIBO 600 SLING

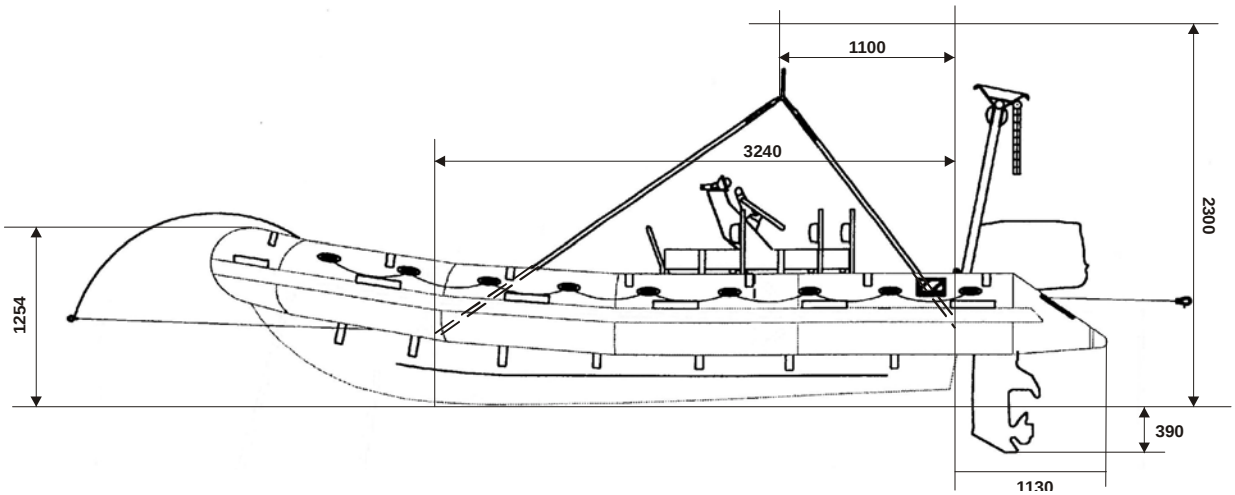

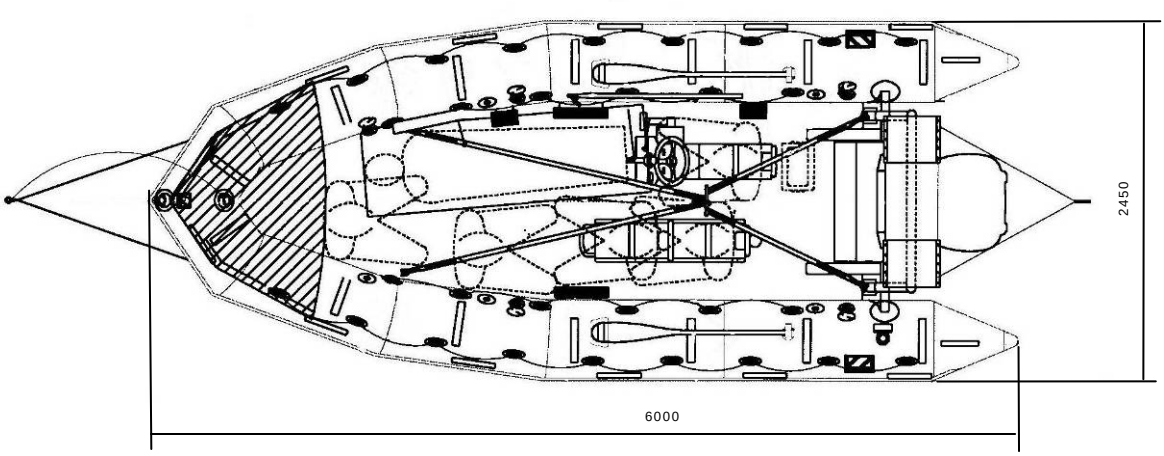

Overall dimensions with lifting system

RIBO 600 24052012 KLT.doc	Issue: 6	Date: 24/05/2012

Dimensions and weight +/- 5%
SURVITEC SAS reserves the right to change specification without notice.
For installation, add minimum +10mm for clearance to dimensions of the container.

SURVITEC SAS - Route de Chatenet - 17210 Chevanceaux - France
iteczodiac.com / solas.sales@surviteczodiac.com / solas.service@surviteczodiac.com

survitecgroup

CAPACITY	
Number of persons: 6	Buoyancy volume: 2600 l / 92 cft

DIMENSIONS				
Length		Width		Buoyancy diameter
Overall	Inside	Overall	Inside	0.550 m / 22''
6 m / 19'08''	4.47 m / 14'08''	2.45 m / 8'	1.35 m / 4'05''	

SAFETY / INFLATION		
. 5 airtight compartments	. 5 inflation valves	. 5 overpressure valves

WEIGHT		
With equipment & batteries	With equipment, engine (90 HP) & fuel	Operational weight with 6 passengers (90 HP)
494 kg / 1089 lbs	785 kg / 1730 lbs	1283 kg / 2828 lbs

ENGINE			
Shaft length	Engine power		Fuel tank
long	75 HP	90 HP	93 l 24.5 l USCG

TOWING	
. 2 bow towing rings on hull	. 1 bow towing V with on load release shackle
. 2 towing points on transom	. 1 aft towing V with snap hook

HOISTING		
. 2 bow lifting points	. 2 aft lifting points on transom	. 1 lifting sling

FABRIC	
. Neoprene orange fabric	. Buoyancy
. Reflective tapes	. Peripheral rubbing strake

HULL	
. GRP composite rigid orange hull	. Reflective tapes
. 1 hull drain	

Dimensions and weight +/- 5%
SURVITEC SAS reserves the right to change specification without notice.
For installation, add minimum +10mm for clearance to dimensions of the container.

SURVITEC ZODIAC SOLAS LIFERAFTS

SURVITEC SAS - Route de Chatenet - 17210 Chevanceaux - France
iteczodiac.com / solas.sales@surviteczodiac.com / solas.service@surviteczodiac.com

survitecgroup

TRANSOM

. 2 self bailers . Aluminium transom well
. Engine aluminium mounting plate . Engine wooden plate

HANDLING

. 2 inside lifelines . 1 peripheral outside lifeline . 2 paddles' supports

SELF RIGHTING SYSTEM

. Self righting frame on transom . Self righting buoyancy . CO^2/N^2 inflation system

CONSOLE / SEATING

. Steering console . 1 pilot jockey seat . 1 crew jockey seat + handles (2 persons)

EQUIPMENT FIXED TO THE RESCUE BOAT

. Towing line (50m) . Rescue quoits (2) . Boarding ladder . Boat hook
. Paddles (2) . Flashing light . Radar reflector . Bow cover

OTHER EQUIPMENT

. Compass . Whistle . Bailer . Pump
. Sponge (2) . Sea anchor . Repair kit . Manual
. First aid kit . Floating knife . Fire extinguisher . Equipment bag
. Search light . Electrical torch . Torch spare bulb & batteries
. Thermal protective aid (2) . Overall cover

OPTIONS

. Release hook: SWL ≥ 1500 kg

. **Engines**: Yamaha 75 CETOL - Towing force: 364 daN
Engine weight: 120.5 kg
Yamaha 90 AETOL - Towing force: 382 daN
Engine weight: 120.5kg
Evinrude E75DPL - Towing force: 451 daN
Engine weight: 145 kg
Evinrude E90DPL - Towing force: 472 daN
Engine weight: 145 kg


. Propeller pitch: Yamaha 75 HP: 13.25 x 13 90 HP: 13.25 x 15
Evinrude 75 HP: 13.25 x 13 90 HP: 13.25 x 13

Dimensions and weight +/- 5%
SURVITEC SAS reserves the right to change specification without notice.
For installation, add minimum +10mm for clearance to dimensions of the container.


SURVITEC ZODIAC SOLAS LIFERAFTS


SURVITEC SAS - Route de Chatenet - 17210 Chevanceaux - France
iteczodiac.com / solas.sales@surviteczodiac.com / solas.service@surviteczodiac.com

COUPE / CUT
C200 - C200

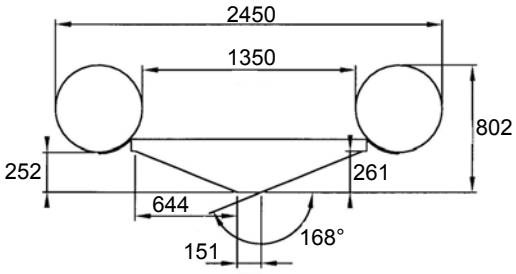

COUPE / CUT
C3000 - C3000

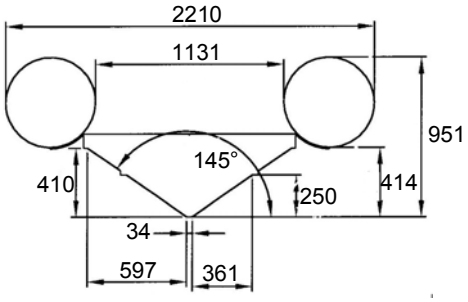

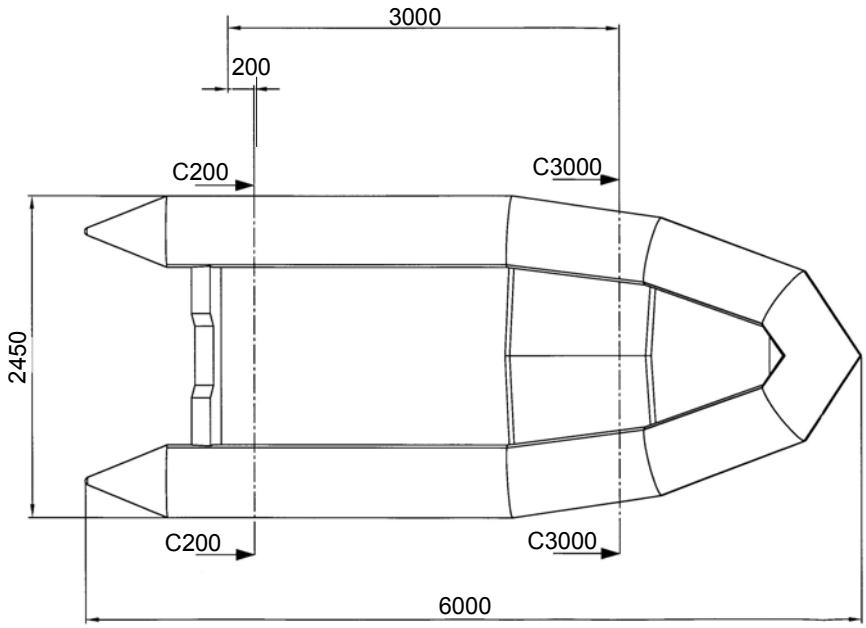

Hull profile

Approvals:	**EC – TC**

RIBO 600 24052012 KLT.doc	Issue: 6	Date: 24/05/2012

Dimensions and weight +/- 5%
SURVITEC SAS reserves the right to change specification without notice.
For installation, add minimum +10mm for clearance to dimensions of the container.