

survitec

SOLAS BOATS

SEARCH AND RESCUE BOAT SOLUTIONS ↓





RIBO

SEARCH AND RESCUE BOAT SOLUTIONS ↓




Offering speed and stability, SurvitecZodiac offers a range of boats specifically designed for search and rescue operations in the most arduous of environments. The range includes varying sizes to suit multiple purposes and requirements, adapted to suit your operational needs. Offering complete seaworthiness, shock mitigation and low freeboard, these boats are ideal for optimising stability and manoeuvrability when critical support is required.

Designed and manufactured out of our highly successful manufacturing facility in Chevanceaux (SurvitecZodiac), France, the search and rescue boats are constructed with durable neoprene fabric and a strong GRP composite hull, allowing for the transportation and rescue of liferafts with a capacity of up to 150 people.

FEATURES

- EASILY ACCESSIBLE AND CAN BE LAUNCHED QUICKLY WITH A LIFTING SLING AND RELEASE HOOK IN ANY CIRCUMSTANCES
- ADAPTED DESIGN FOR USE ON YACHTS
- ALLOWS FOR EITHER 5 OR 6 PASSENGERS
- EQUIPMENT PROVIDED WITH BOATS INCLUDES: BOARDING LADDER, TOWING LINE, BOAT HOOK, RADAR REFLECTOR AND POSITIONING LIGHT
- RIBO 600 AND FRB 600 ARE EQUIPPED WITH SELF RIGHTING SYSTEM SUITABLE FOR USE IN DIFFICULT SEAS

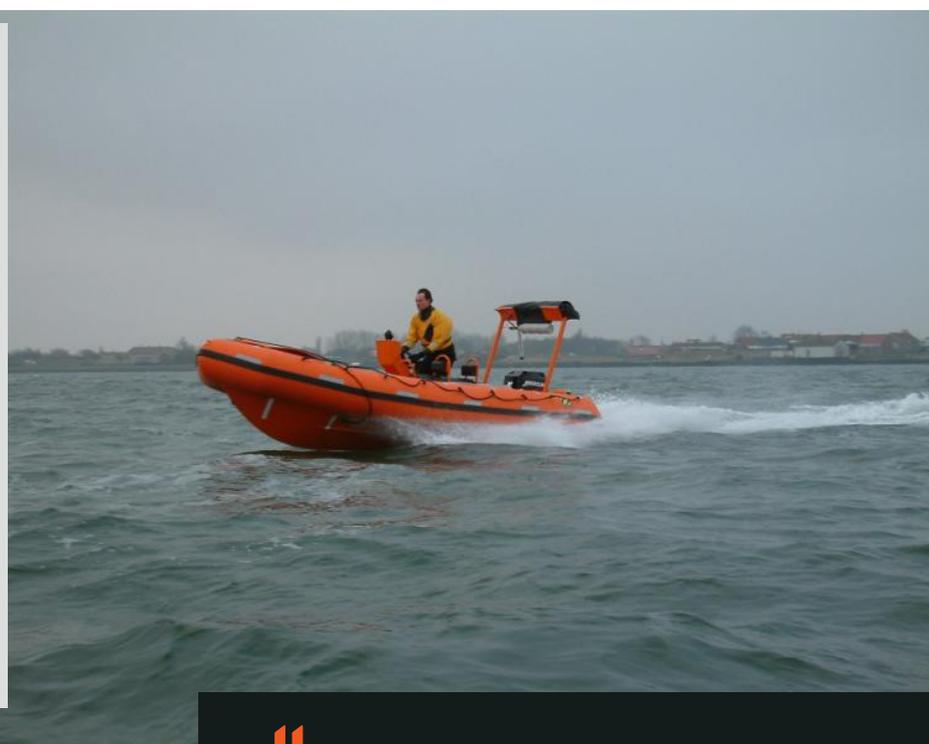

Designed and manufactured out of our highly successful manufacturing facility in Chevanceaux (SurvitecZodiac), France.

RIBO - SEARCH & RESCUE

RESCUE BOAT SOLUTIONS ↓

RIBO 340

The SurvitecZodiac RIBO 340 P Sling is a 'Non SOLAS' rigid/inflatable rescue boat with a capacity of up to five people. It refers to EC Directive 2002/35/EC for fishing vessels of 24 meters and over. This is linked to the Torremolinos Convention for fishing vessels that allows Marine Administrations the possibility to accept "Non SOLAS " rescue boat under 3.80 m but over 3.30 m with a capacity of 5 people (4 seated, 1 lying).

Advanced features of SurvitecZodiac RIBO 340

- Length 3.40m
- Launched by means of sling and approved release hook



TECHNICAL DATA RIBO 340

CAPACITY	5 people
DIMENSIONS L X W	3.4m x 1.71m
WEIGHT	1641.5 kg (operational)
TOWING	Bow towing points and V bridle/ Aft towing V bridle/ Transom towing points
HOISTING	Bow/ aft lifting points + sling Release hook SWL ≥ 750 kg
ENGINES	YAMAHA 25HP

RIBO 450

This rescue boat is equipped with a self-righting system and can be launched using a 4-point sling and approved release hook. The 450 is a SOLAS rigid/inflatable rescue boat approved with USCG, TC and EC approval certificates. The RIBO 450 has a capacity of 6 people with one fixed bench and two tilting benches.

Advanced features of SurvitecZodiac RIBO 450

- Length 4.50m
- Launched by means of a four point sling and approved release hook



TECHNICAL DATA RIBO 450

CAPACITY	6 people
DIMENSIONS L X W	4.5m x 1.9m
WEIGHT	901 kg (operational) EC 867 kg (operational) US
TOWING	Bowing towing points & V bridle/ Aft towing V bridle / Transom towing points
RIGHTING SYSTEM	Righting bag assist
HOISTING	Bow / aft lifting points + sling Release hook SWL ≥ 950kg ≤ 1.5 ton
ENGINES	Evinrude / Yamaha / Tohatsu 25HP /40HP

RIBO - SEARCH & RESCUE

RESCUE BOAT SOLUTIONS ↓

RIBO 600

The SurvitecZodiac RIBO 600 can be sling launched using an appropriate release hook (SWL > 1500kg). This boat features a wheel console with jockey seat, two further jockey seats, additional seating for two further passengers and additional space for a full stretcher. The 600 is a SOLAS rigid/inflatable rescue boat approved with USCG and EC approval certificates

Advanced features of SurvitecZodiac RIBO 600

- Length 6.00m
- Launched by means of a four point sling and approved release hook
- Self righting frame



TECHNICAL DATA RIBO 600

CAPACITY	6 people
DIMENSIONS L X W	6m x 2.45m
WEIGHT	1283 kg (operational)
TOWING	Bow towing points & V bridle / Aft towing V bridle / Transom towing points
RIGHTING SYSTEM	Self-righting frame + buoyancy
HOISTING	Bow / aft lifting points + sling Release hook SWL ≥ 1500 kg
ENGINES	EVINRUDE & YAMAHA 75HP / 90HP


FRB 600 SELF-RIGHTING SYSTEM IN ACTION



STORAGE SOLUTIONS

The RIBO range can be stored on:

- Aluminium tilting cradle (RIBO 450)
- Davit and specifically designed cradle options



APPROVALS

HSC code, LSA code, EC (MED), USCG, TC, RMRS



Transport
Canada



DSB INFLATABLE RESCUE BOATS

SEARCH AND RESCUE BOAT SOLUTIONS ↓

DSB part of the Survitec Group has a global presence with a worldwide reach. DSB pioneered the design and manufacture of Rescue Boats in 1931, making them the safest, most popular and widely used Rescue Boats in the international survival market. Designed for commercial and military applications and with broad adaptability we offer our customers' turnkey boat solutions. Our products meet the highest safety regulations in the industry and all of our rescue boats meet current SOLAS approvals. DSB offers two types of Rescue Boats; Inflatable and Semi Rigid.

DSB Inflatable Rescue Boats are available in several sizes including 420, 470 and 530. Exceptionally lightweight due to ultra-light Hypalon fabric and smaller outboard engine, our boats require smaller davits making transport and servicing easier, more efficient and economical. Built for a variety of end users including commercial and defence organisations, the DSB Rescue Boats couple operator friendly, advanced performance capabilities with durability and innovative design.

FEATURES

- INFLATABLE DEEP V SHAPED KEEL FOR IMPROVED MANOEUVRABILITY
- FITTED WITH RADAR REFLECTOR, COMPASS AND ALL STANDARD SAFETY EQUIPMENT
- REINFORCED HYPALON SEAMS
- HYPALON FENDER TUBE IS UV AND ABRASION RESISTANT
- INFLATABLE KEEL RESULTING IN EXCELLENT MANOEUVRABILITY IN THE WATER
- ADVANCED BOW DESIGN INCREASES INTERNAL SPACE
- LIGHTWEIGHT RESULTING IN EASIER MANOEUVRABILITY



DSB - INFLATABLE BOATS

RESCUE BOAT SOLUTIONS ↓

TECHNICAL DATA

Product Name	DSB 420	DSB 470	DSB 530
Overall Length	4.20 m	4.70 m	5.30 m
Length Inside	2960 mm	3420 mm	3795 mm
Beam Overall	1800 mm	1980 mm	2135 mm
Beam Inside	890 mm	980 mm	1035 mm
Boat Weight	123 kg	149 kg	179 kg
Stowed Boat Dimensions on a palette	160 x 80 x 90 cm	160 x 80 x 110 cm	175 x 85 x 140 cm
Capacity	6 persons	7 persons	15 persons
Max Hoisting Weight (operational)	801 kg	910 kg	1610 kg
Tube Diameter	455 mm	500 mm	550 mm
Air Compartments	5 Chambers	5 Chambers	7 Chambers
Fabric	Hypalon/Neoprene	Hypalon/Neoprene	Hypalon/Neoprene
Min Motorisation	11.2/15 kW/PS	11.2/15 kW/PS	11.2/15 kW/PS
Max Motorisation	29.5/40 kW/HP	29.5/40 kW/HP	29.5/40 kW/HP
Key points	Inflatable Keel	Inflatable Keel	Inflatable Keel



APPROVALS

EC MED





DSB SEMI-RIGID RESCUE BOATS

SEARCH AND RESCUE BOAT SOLUTIONS ↓

DSB Semi-Rigid Rescue Boats are heavy duty products designed and built to offer commercial and defence end users with a product incorporating maximum durability, increased manoeuvrability and an extended life cycle. Our Semi-Rigid Boats with a size range including 3.9, 4.3 and 5.1 are built to the highest quality from marine approved, environmentally friendly materials. Driven to consistently improve our customer offering, our range of Semi-Rigid Rescue Boats meet and exceed our customers' expectations and remain unchallenged in today's survival market. The 4.3 and the 5.1 rescue boats are also approved with a jockey console.

FEATURES

- SELF-DRAINING CONCEALED HULL OFFERING ADDITIONAL SAFETY BUOYANCY
- FITTED WITH RADAR REFLECTOR, COMPASS AND ALL STANDARD SAFETY EQUIPMENT
- REINFORCED HYPALON SEAMS
- HYPALON FENDER TUBE IS UV AND ABRASION RESISTANT
- ALUMINIUM SANDWICH HULL IS SEA WATER AND CAPILLARY CRACK RESISTANT
- ADVANCED BOW DESIGN INCREASES INTERNAL SPACE
- EXCEPTIONAL HULL DESIGN RESULTS IN EXCELLENT MANOEUVRABILITY IN THE WATER



DSB - SEMI-RIGID INFLATABLE BOATS

RESCUE BOAT SOLUTIONS ↓

TECHNICAL DATA			
Product Name	DSB 3.9 SR	DSB 4.3 SR	DSB 5.1 SR
Overall Length	3.90 m	4.30 m	5.10 m
Length Inside	3000 mm	3350 mm	4080 mm
Beam Overall	1970 mm	1940 mm	2050 mm
Beam Inside	1070 mm	1040 mm	1150 mm
Boat Weight	150 kg	203 kg	266 kg
Capacity	6 persons	7 persons	13 persons
Max Hoisting Weight (operational)	778 kg	964 kg	1523 kg
Tube Diameter	450 mm	450 mm	450 mm
Air Compartments	5 Chambers	5 Chambers	5 Chambers
Fabric	Hypalon/Neopren (e)/ Aluminium	Hypalon/Neopren (e)/ Aluminium	Hypalon/Neopren (e)/ Aluminium
Min Motorisation	11.2/15 kW/PS	11.2/15 kW/PS	11.2/15 kW/PS
Max Motorisation	29.5/40 kw/HP	29.5/40kw/HP	51.5/70 kw/HP
Key points	Heavy duty aluminium boat hull	Heavy duty aluminium boat hull Also available with jockey console	Heavy duty aluminium boat hull Also available with jockey console



APPROVALS

EC MED



survitec

GET IN TOUCH

Email info@survitecgroup.com

www.survitecgroup.com